

COUPLER

Emco Wheaton DRY-BREAK™ Couplers and Adapters are used anywhere spill-free fluid transfer is required.

- Cannot be opened until connected to adapter or disconnected until lever is moved to closed position thus eliminating accidental spillage
- Product loss on disconnect virtually eliminated
- Aluminum version available with straight or 90° integrated ball-bearing swivel for kink-free hose connection
- Easily serviced in the field using the *Emco Wheaton Repair Kit Program*
- Interchangeable with all existing Emco Wheaton 1.5" and 2" inlet adapters

ADAPTER

- Enhanced poppet design allows for better flow characteristics in either direction
- Rear-entry design allows for easy field servicing
- One-piece poppet means fewer components for service
- Interchangeable with all existing Emco Wheaton 1.5" and 2" inlet couplers

ACCESSORIES

Dust Cap for Adapter



Adapter Opener









Dust Plug for Coupler



TECHNICAL SPECIFICATIONS

J72 Pressure Drop

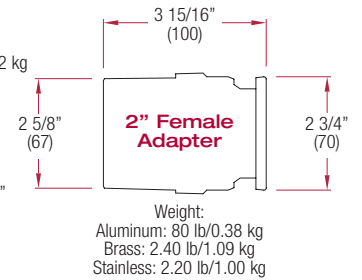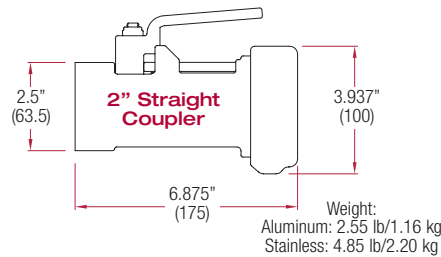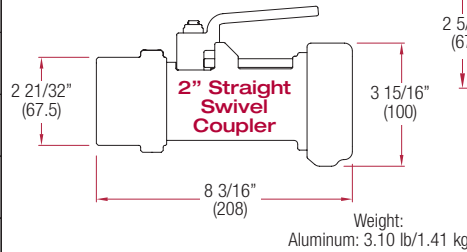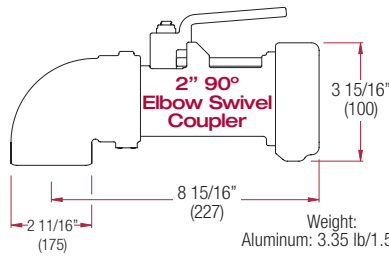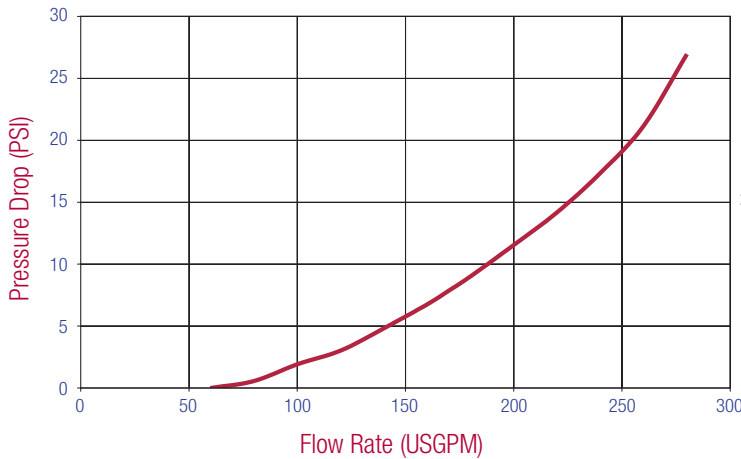

TO ORDER 2-INCH PRODUCTS

Configure your part number as shown below.
Sample Part Number:

J 7 2 C - S V N 0 - B 0 0 1

Type	Body Material	Seals	Inlet	Swivel	Rev.	Special Features
C=Coupler	S=Stainless Steel	V=Viton	N=Female NPT	0=Straight (No Swivel)	A	001=90° Handle
A=Adapter	A=Aluminum	B=Buna	M=Male NPT	1=Straight with Swivel	B	002=SST Trim
	B=Brass	P=Perfluoroelastomer (Chemraz)	I=ISO 228 Parallel	2=90° with Swivel	C	003=Selective (3-pin)
					etc.	004=with dust cap
						008=Selective (2-pin)

Note: for 1.5" inlet, use J79 instead of J72.