

DRY-BREAK

PRODUCT BULLETIN:

J72 2-INCH STAINLESS STEEL DRY-BREAK™ COUPLER & ADAPTER

J72 STAINLESS ADAPTER

- *Optional aluminum or rubber Dust Cap*
- *Rear entry design allows for easy field servicing with Emco Wheaton Repair Kit Program;*



J72 STAINLESS COUPLER

- *Featuring all 300 series stainless components*
- *Pressure rating of 85 psi*
- *Serviceable with the Emco Wheaton Repair Kit Program*



EMCO WHEATON CORP.
2480 Bristol Circle, Oakville,
Ontario, Canada, L6H 5S1
Tel: 905-829-8619
Fax: 905-829-8620
July 2002

EMCO WHEATON™
A Syltone Company
www.emcowheatoncanada.com




PRODUCT BULLETIN:
J72 2-INCH STAINLESS STEEL DRY-BREAK™
COUPLER & ADAPTER

DRY-BREAK

System Coupled in the Closed Position



System Coupled in the Open Position

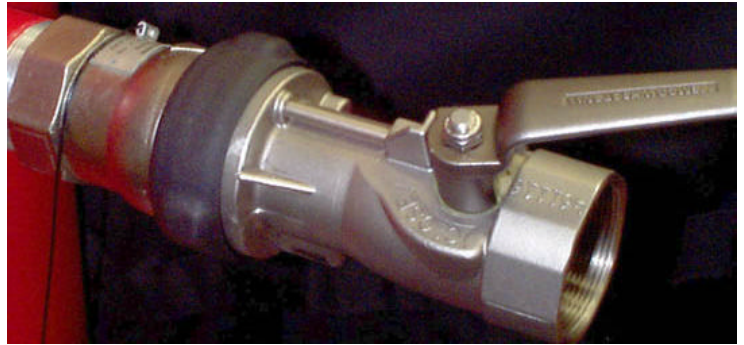

CHEMRAZ® 505 SEALS

- *Perfluoroelastomer combining the almost universal chemical resistance of PTFE with the resilience of elastomers;*
- *Broad range of chemical resistance, covering the spectrum from acids to caustics, aldehydes, esters, ethers, aromatics, hot water, sour water, steam, amines, methanol, ketones, TBA and MTBE.*
- *Precision seal design represents the ultimate in high technology elastomeric seals*

PHYSICAL PROPERTIES

HARDNESS	75A
TENSILE, PSI	1750
50% MODULUS, PSI	450
100% MODULUS, PSI	1150
ELONGATION	140
TR10 50% STRETCH, °F	+5
Compression Set (70 hours at 400°F), ASTM D395, Method B	
#214 O-ring, %	25
Button, %	13
TEMPERATURE RANGE	-20°F to 425°F

EMCO WHEATON CORP.
 2480 Bristol Circle, Oakville,
 Ontario, Canada, L6H 5S1
 Tel: 905-829-8619
 Fax: 905-829-8620
 July 2002

EMCO WHEATON™
 A Syltone Company
www.emcowheatoncanada.com

